



More Precision


wireSENSOR // Draw-wire displacement sensors



- Extreme compact miniature sensor
- Flexible mounting via swivel flange
- High speed measurement, wire acceleration up to 100g



Model MPM

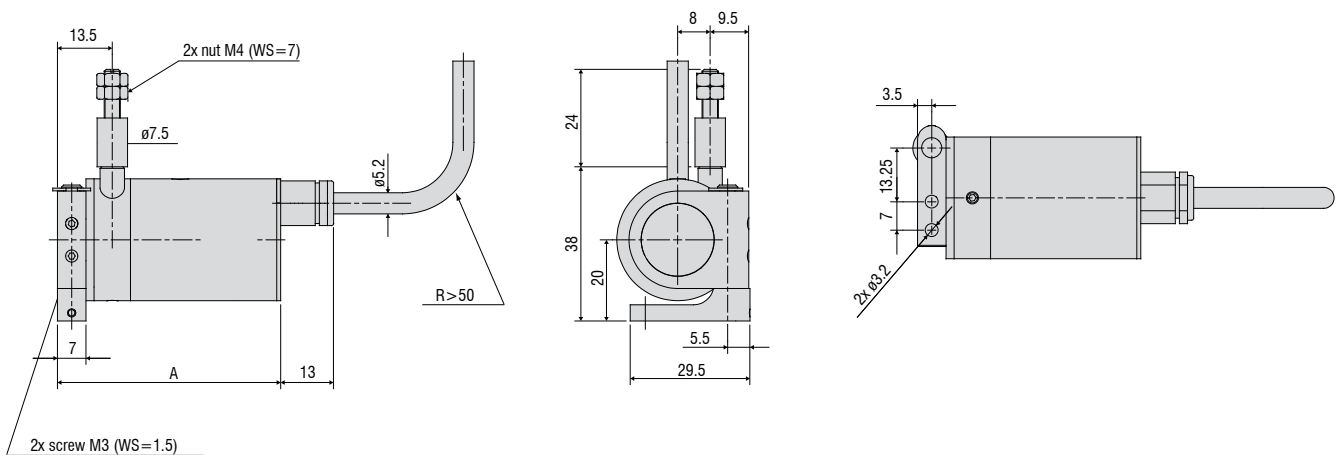

| Measuring range (mm) | A (mm) |
|----------------------|--------|
| 50 | 55 |
| 150 / 250 | 64 |
| 50-HG | 61 |
| 150 / 250-HG | 70 |

| Model | WDS-50-MPM | WDS-150-MPM | WDS-250-MPM |
|-----------------------------|---------------------------------------|----------------------------|-------------|
| Output | P | | |
| Measuring range | 50mm | 150mm | 250mm |
| Linearity | ±0.2% FSO | - | ±0.3mm |
| | ±0.25% FSO | ±0.125mm | - |
| Resolution | towards infinity | | |
| Sensor element | conductive plastic potentiometer | hybrid potentiometer | |
| Temperature range | -20 °C ... +80 °C | | |
| Material | housing | aluminum | |
| | draw-wire | stainless steel (ø 0.45mm) | |
| Sensor mounting | swivel flange in two axes 180° / 360° | | |
| Wire mounting | thread M4 | | |
| Wire acceleration | approx. 25g (option HG: 100g) | | |
| Wire retraction force (min) | 1.5N (option HG: 10N) | | |
| Wire extension force (max) | 3.5N (option HG: 17N) | | |
| Protection class | IP65 | | |
| Vibration | 20g, 20Hz - 2kHz | | |
| Mechanical shock | 50g, 20ms | | |
| Electrical connection | integrated cable, axial, 3-leads, 1m | | |
| Weight | approx. 150g | | |



FSO = Full Scale Output
 Specifications for analog outputs on page 51.

Article description

| WDS - | 50 - | MPM - | C - | P - | HG |
|-------|------|-------|-----|-----|---|
| | | | | | Option HG: wire acceleration up to 100g |
| | | | | | Output option: P: potentiometer |
| | | | | | Connection: C: integrated cable, axial, 1m |
| | | | | | Model MPM |
| | | | | | Measuring range in mm |

Accessories:

| | |
|-------------|---|
| WE-xxx-M4 | Wire extension with M4-wire connection, x=length |
| WE-xxx-Clip | Wire extension with eyelet, x=length |
| TR1-WDS | Pulley wheel, adjustable |
| TR3-WDS | Pulley wheel, fixed |
| GK1-WDS | Attachment head for M4 |
| MH1-WDS | Magnetic holder for wire mounting |
| MH2-WDS | Magnetic holder for sensor mounting |
| MT-60-WDS | Mounting clamp for WDS-P60 |
| FC8 | Female connector for WDS, 8-pin |
| FC8/90 | Female connector 90° for WDS |
| PC 3/8-WDS | Sensor cable, length 3m |
| PS 2020 | (Power Supply 24 V / 2,5 A, Input 100 - 240 VAC, output 24 VDC / 2.5 A, for snap in mounting on DIN 50022 rail) |
| WDS-MP60 | Mounting plate for P60 sensors |

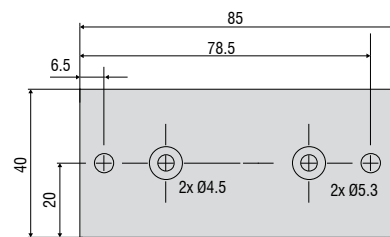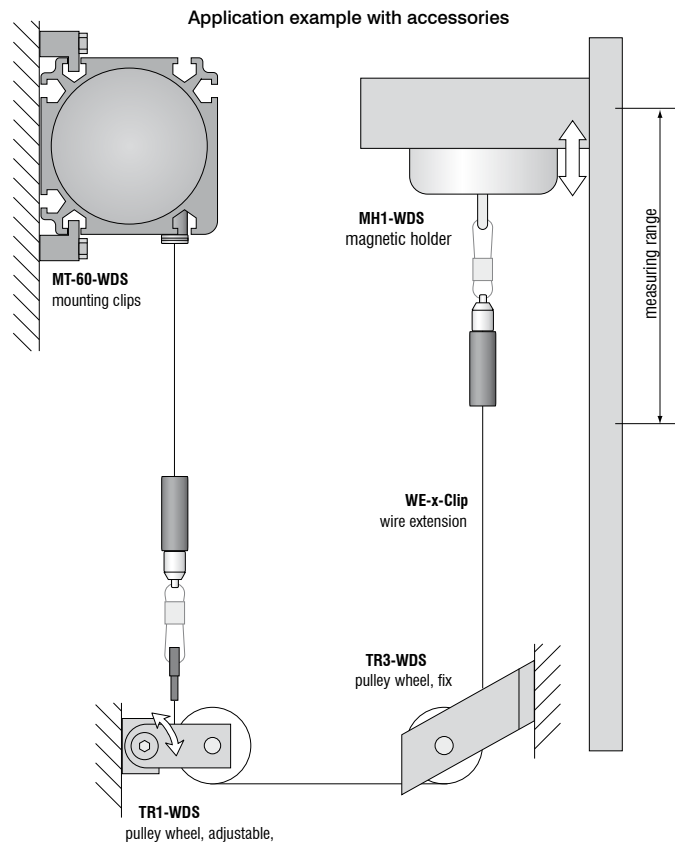


Mounting plate WDS-MP60

Installation information:




Wire attachment: The free return of the measurement wire is not permissible and it is essential that this is avoided during installation.




Wire exit angle:

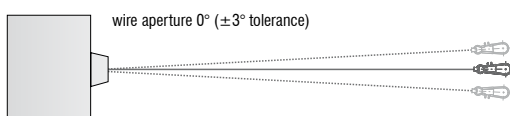


When mounting a draw-wire displacement sensor, a straight wire exit ($\pm 3^\circ$ tolerance) must be taken into account. If this tolerance is exceeded, increased material wear on the wire and at the wire aperture must be expected.

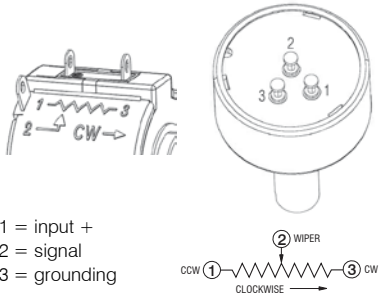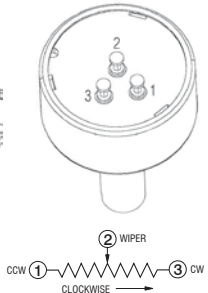

| Output | Plug M16 -SA / -SR | Integrated cable -CA / -CR | Open contacts |
|--------|-----------------------|-------------------------------|---------------|
|--------|-----------------------|-------------------------------|---------------|

| Potentiometric output (P) | | | | |
|---------------------------|----------------------------------|--|---|---|
| Supply voltage | max. 32VDC at 1kOhm / 1 Wmax |  <p>sensor side</p> <p>1 = input + 2 = grounding 3 = signal</p> |  |  <p>1 = input + 2 = signal 3 = grounding</p> |
| Resistance | 1kOhm $\pm 10\%$ (potentiometer) | | | |
| Temperature coefficient | $\pm 0.0025\%$ FSO/ $^{\circ}$ C | | | |

| Voltage output (U) | | | | |
|--|---|---|--|---|
| Supply voltage | 14 ... 27VDC (non stabilized) |  <p>sensor side</p> <p>1 = supply 2 = grounding 3 = signal 4 = ground</p> |  |  <p>white = supply brown = grounding green = signal yellow = ground</p> |
| Current consumption | max. 30mA | | | |
| Output voltage | 0 ... 10VDC Option 0 ... 5 / ± 5 V | | | |
| Load impedance | $> 5k\Omega$ | | | |
| Signal noise | $0.5mV_{\text{eff}}$ | | | |
| Temperature coefficient | $\pm 0.005\%$ FSO/ $^{\circ}$ C | | | |
| Electromagnetic compatibility (EMC) | EN 61000-6-4 EN 61000-6-2 | | | |
| Adjustment ranges (if supported by the model) | | | | |
| Zero | $\pm 20\%$ FSO | | | |
| Sensitivity | $\pm 20\%$ | | | |

| Current Output (I) | | | | |
|---|--------------------------------|--|---|---|
| Supply voltage | 14 ... 27VDC (non stabilized) |  <p>sensor side</p> <p>1 = supply 2 = grounding</p> |  |  <p>white = supply brown = grounding</p> |
| Current consumption | max. 35mA | | | |
| Output current | 4 ... 20mA | | | |
| Load | $< 600\Omega$ | | | |
| Signal noise | $< 1,6 \mu A_{\text{eff}}$ | | | |
| Temperature coefficient | $\pm 0.01\%$ FSO/ $^{\circ}$ C | | | |
| Electromagnetic compatibility (EMC) | EN 61000-6-4 EN 61000-6-2 | | | |
| Adjustment range (if supported by the model) | | | | |
| Zero | $\pm 18\%$ FSO | | | |
| Sensitivity | $\pm 15\%$ | | | |

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)



Optical micrometers, fiber optic sensors and fiber optics



Color recognition sensors, LED analysers and color inline spectrometer



Measurement and inspection systems