



More Precision.

Sensor systems for testing LEDs and self-luminous objects

Color | Intensity | Function | Light spectrum

LEDs and Illumination





Multipoint color recognition system



Series with 7 detection points:
MFA-7, MFA-14, MFA-21, MFA-28



Color inspection in the XYZ, xyY, Luv, uvL
and RGB color spaces



Color distinction, intensity test &
functional test



Output of the dominant wavelength (λ_{dom})
and color temperature (CCT)



Features:

- Universal coupling of MFS receiver sensors
- Available with either 7, 14, 21 or 28 measurement channels
- Individual adaption of the sensor configuration
- Each measuring position is freely configurable in terms of color, intensity and function
- Integration into testing process via RS232, RS422 or USB interface
- Output of XYZ, xyY, Luv, uvL, RGB, CCT, λ_{dom} values
- Exchangeable MFS receiver sensors
- Sensor cables with max. 2m-plastic fiber or with max. 5m-glass fibers
- Software for comprehensive evaluation and display

Applications:

- Testing self-luminous objects
- LED tests (binning)
- Indicator tests
- Display tests
- 7-segment display tests
- Front panel tests

Function:

The information about color, intensity and light are directly transmitted from the measuring object to the MFA sensor via single fiber bundles. One MFA-28 simultaneously monitors up to 28 specimens.

The inspection of inaccessible specimens and/or specimens that are situated far apart from one another can easily be achieved using the MFA series, as optical fibers transmit the information to the evaluation unit.

Advantages

- High repeatability
- High measuring rate and dynamics
- Customer-specific MFS sensors (length and design)
- Digital interfaces: USB, RS422 or RS232



| Model | | MFA-7 | MFA-14 | MFA-21 | MFA-28 |
|---------------------------------|-------------|---|---|---|---|
| Article number | | 11094994 | 11094995 | 11094996 | 11094997 |
| No. of measurement channels | | 7 | 14 | 21 | 28 |
| Repeatability ¹⁾ | | xy < ±0.000025 | | | |
| Spectral range | | 400 ... 700 nm | | | |
| Sensitivity range | | 1 ... 50.000 lx | | | |
| Measurement values | | XYZ, xyY, Luv, uvL, RGB, CCT, λdom | | | |
| Measuring rate ²⁾ | | < 100 Hz | < 80 Hz | < 60 Hz | < 50 Hz |
| Temperature stability | Zero point | < 0.09 % FSO / K | | | |
| | Sensitivity | < 0.09 % FSO / K | | | |
| Supply voltage | | + 24 V DC ±10% | | | |
| Maximum power consumption | | 500 mA | | | |
| Digital interface | | USB, RS422 or RS232 | | | |
| Connector | Optical | 7 connections or ports for MFS sensors | 14 connections or ports for MFS sensors | 21 connections or ports for MFS sensors | 28 connections or ports for MFS sensors |
| | Electrical | 8-pole M12 socket for RS422 / RS232 / USB 4-pin plug for power supply | | | |
| Mounting | | Screw connection with four through-holes | | | |
| Temperature range | Storage | -10 ... +55 °C | | | |
| | Operation | +0 ... +50 °C | | | |
| Air humidity | | 20 ... 80 % r.H. (non-condensing) | | | |
| Shock (DIN EN 60068-2-27) | | 15 g / 6 ms + two directions, 1000 shocks in each of 3 axes | | | |
| Vibration (DIN EN 60068-2-6) | | 2 g / 10 ... 500 Hz + 10 cycles in each of 3 axes | | | |
| Protection class (DIN EN 60529) | Front side | IP20 | | | |
| Material | | Aluminum housing, coated in black | | | |
| Weight | | 247 g | 262 g | 278 g | 293 g |
| Compatibility | | with all MFS sensors | | | |
| Control and indicator elements | | Status LED (green: smooth operation; orange: error; blue: overmodulation) | | | |


FSO = Full Scale Output

¹⁾ Maximum color deviation in x and y of 1000 consecutive measurements on red, green, blue and white light of an RGB LED with 12W/m and 300 lm/m. Measured with MFS-K04 sensor at 10 Hz data rate and brightness adjustment to RGB color mixture white with maximum illuminance.

²⁾ Valid for a baud rate of 230400 and the transmission of the color values plus time stamp. The measuring rate decreases when transmitting λdom and CCT.

Dimensions:

Dimensions in mm, not to scale

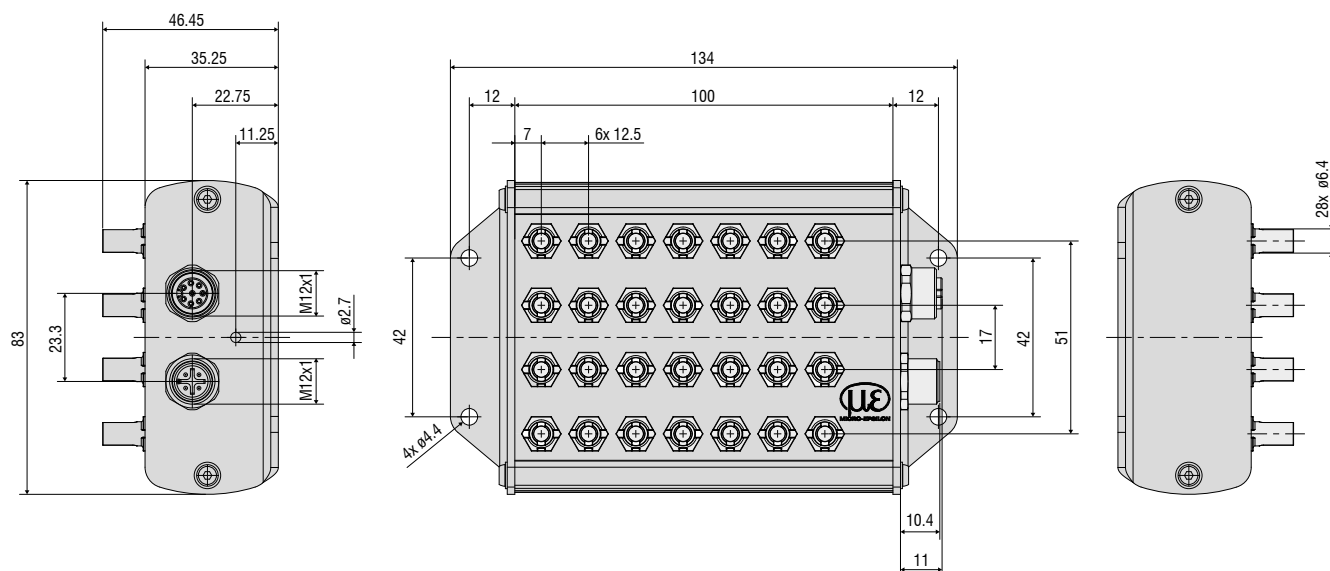



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement



Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection