




More Precision

induSENSOR // Linear inductive displacement sensors



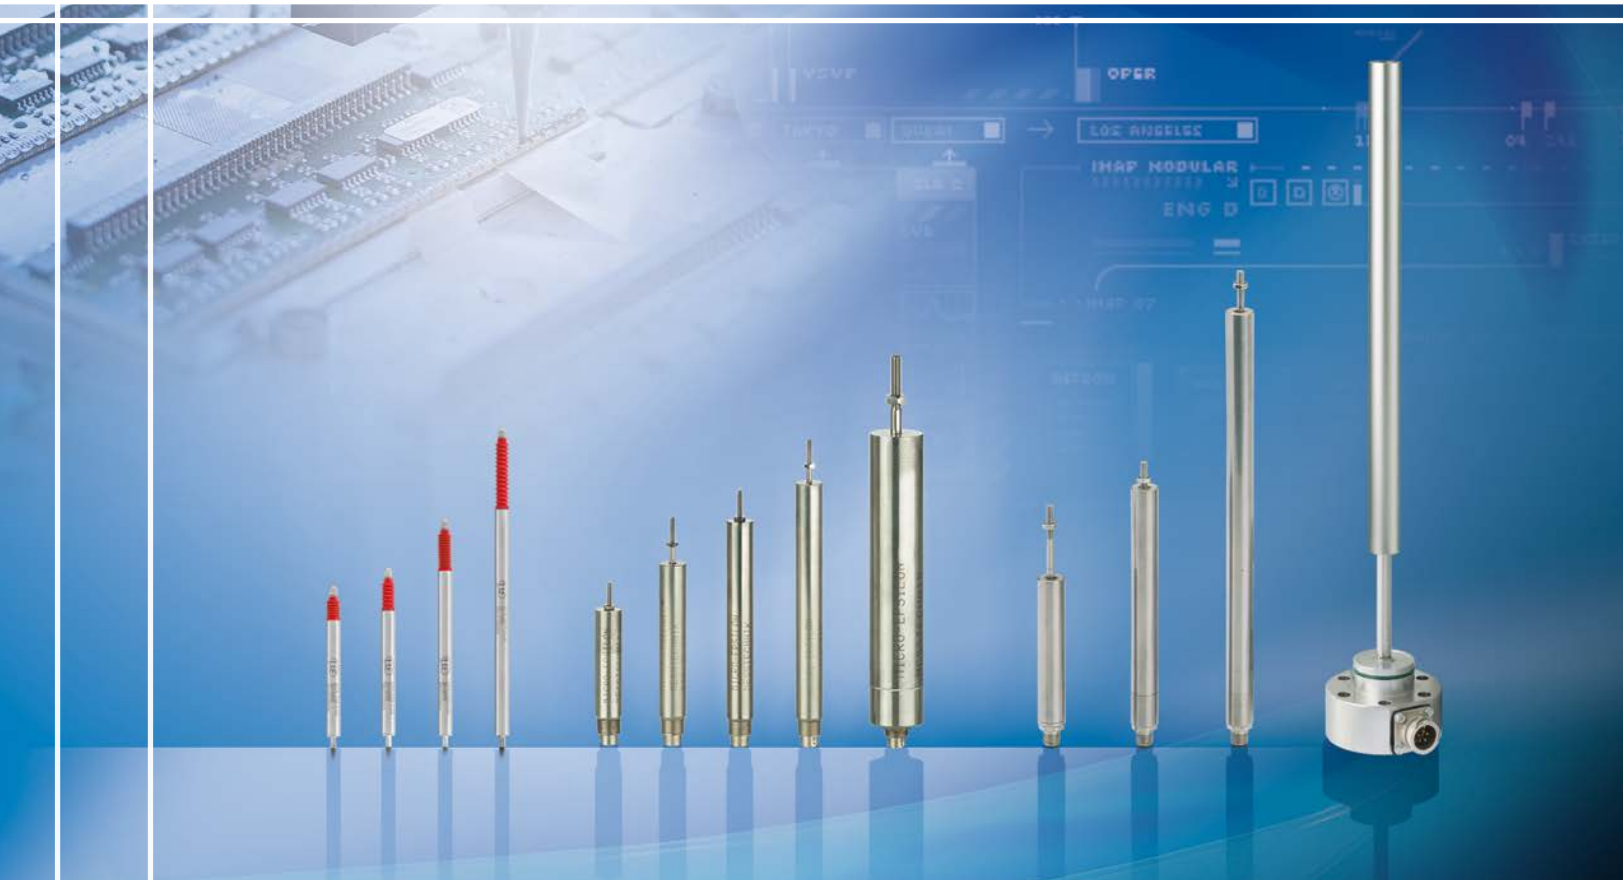

- Measurement ranges 75 ... 630mm
- Linearity $\pm 0.3\%$ FSO
- Integrated microelectronics
- High pressure resistance
- Oil resistant and maintenance-free
- Short offset ranges

The sensor elements of the EDS series are protected by a pressure resistant stainless steel housing. The sensor electronics and signal conditioning are completely integrated in a sensor flange.

As a target an aluminium sleeve is used which is integrated into the piston rod and is passed without making contact and wearfree over the sensor rod. Integration in a hydraulic cylinder Due to the use of the eddy current principle, no permanent magnets need to be mounted inside the cylinder.

Due to the rugged design of the long-stroke sensors of the EDS series, these sensor systems have proven themselves, not only through the integration in hydraulic and pneumatic cylinders, but especially under harsh industrial conditions.

Typical applications

Long-stroke sensors in the EDS series are designed for industrial use in hydraulic and pneumatic cylinders for the displacement and position measurement of pistons or valves, e.g. for the measurement of

- displacement, distance, position, gap
- deflection
- movement, stroke
- filling level, immersion depth, spring travel




EDS series: integration in a hydraulic cylinder


Model	EDS-75	EDS-100	EDS-160	EDS-200	EDS-250	EDS-300	EDS-400	EDS-500	EDS-630	
Connection	S	S, F	S, F	S	S, F	S, F	S, F	S	S, F	
Measuring range	75mm	100mm	160mm	200mm	250mm	300mm	400mm	500mm	630mm	
Linearity	≤0.3% FSO	0.23mm	0.3mm	0.48mm	0.6mm	0.75mm	0.9mm	1.2mm	1.5mm	1.89mm
Resolution	0.05% FSO	0.038mm	0.05mm	0.08mm	0.1mm	0.125mm	0.15mm	0.2mm	0.25mm	0.315mm
Temperature range	-40°C ... +85°C									
Temperature stability	±200ppm / °C									
Frequency response (-3 dB)	150Hz									
Output	4 - 20mA									
Output load	500Ω									
Power supply	18 - 30VDC									
Current consumption	max. 40mA									
Connector	model S	7-pin connector (sensor cable as an option) options radial or axial output								
	model F	5-pin radial bayonet-connector with mating plug								
Pressure resistance	450bar (sensor rod, flange)									
Protection class	IP 67									
Electromagnetic compatibility (EMC)	EN 61326-1:2006 (spurious emission) EN 61326-2-3:2006 (immunity to interference)									
Shock ¹⁾	40g, 3000 shocks / axis 100g radial, 300g axial									
Vibration	5Hz ... 44Hz ±2.5mm 44Hz ... 500Hz ±23g									
Material	V4A-Steel 1.4571									

FSO = Full Scale Output ¹⁾ Half sinusoid 6 ms


Model S

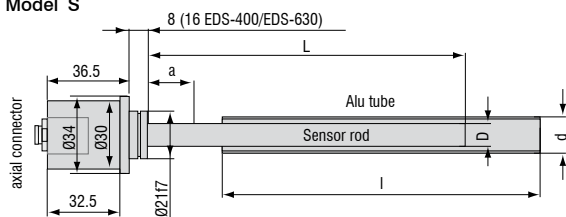

Model F

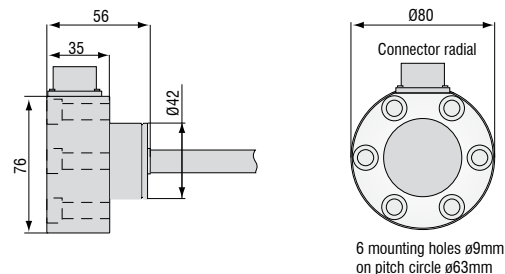

Article

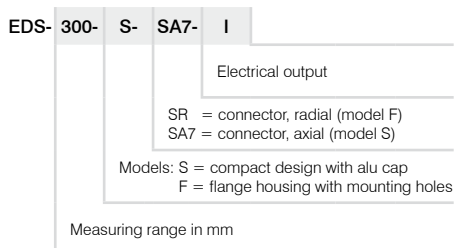

Meas. range	Sensor rod		Alu tube				Offset
	L	D	l	d	a	a	
75	110	10	110	16	15		
100	140	10	140	16	20		
160	200	10	200	16	20		
200	240	10	240	16	20		
250	290	10	290	16	20		
300	340	10	340	16	20		
400	450	12	450 (S) 460 (F)	18 (S) 26 (F)	25		
500	550	12	550	18	25		
630	680	12	680 (S) 690 (F)	18 (S) 26 (F)	25		

General accessories

2960031	MC25D	digital micrometer calibration fixture
2420062	PS2020	power supply on DIN rail, input 100 - 240VAC, output 24VDC / 2.5A
2984026		certificate function and linearity inspection certificate incl. protocol with listed measurement data of the linearity inspection and documentation

AccessoriesLDR series**Connection cable**

0157047	C7210-5/3	sensor cable, 5m, with cable connector
0157048	C7210/90-5/3	sensor cable, 5m, with 90° cable connector

Supply cable

2901087	PC710-6/4	supply/output cable, 6m
---------	-----------	-------------------------

Plunger


0800136	LDR-10	plunger
0800137	LDR-25	plunger
0800138	LDR-50	plunger

AccessoriesEDS series**Service**

2985001		Function and linearity inspection for EDS series incl. pressure inspection and documentation without recalibration
---------	--	---

Connection cable

0157043	C703-5	VIP/LVP/EDS 7-pin connection cable for S series, 5m
2902084	C703-5/U	VIP/LVP/EDS 7-pin connection cable for S series, 5m for voltage output 1 - 5V
0157050	C703/90-5	VIP/LVP/EDS 7-pin connection cable for S series, 5m with 90° cable connector
2901143	C705-5	VIP-/LVP-/EDS -pin connection cable for F series, 5m
2901160	C705-15	VIP-/LVP-/EDS -pin connection cable for F series, 15m

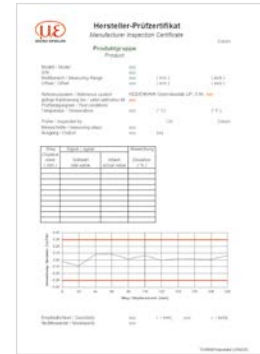

Linearity inspection certificate

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)



Optical micrometers, fiber optic sensors and fiber optics



Color recognition sensors, LED analyzers and color online spectrometer



Measurement and inspection systems